


Telebyte

Model 4901 Multi-Output Noise Simulator

World's First High-Density Noise Simulator!

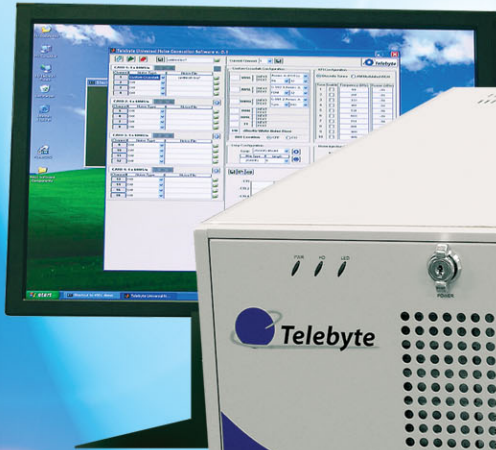

24 Independent Noise Channels

www.telebytebroadband.com

Telebyte

Model 4901 Multi-Output Noise Simulator



Store Noise Injectors in Convenient Rack Mounts

ADSL2+

VDSL2

20 kHz to 30 MHz
Expand System as Needed
Order from 1 to 6 Noise Cards
Independent Control of 2-24 Ports
Wide Variety of Noise Combinations
Common Crosstalks, Impulse Noises
User-Friendly GUI Controls WLS
NEXT, FEXT, Disturber Settings
Import MATLAB or Excel Files
Remote Control via RS-232
Fits in 19" Rack



Rear of Unit Provides Access to 1-6 Noise Cards
with 2-4 Ports on Each Card